



# REVOLUTION POWER AUSTRALIA

RPL12-100USlim LiFePO<sub>4</sub> Deep-Cycle Lithium Battery

## Proven Paralleling Performance



**5** Years  
Replacement  
Warranty

Revolution Power Australia's lithium batteries are the ultimate in deep-cycle battery technology delivering unrivalled performance and product life span. Australia's most advanced state of the art Battery Management System (BMS) inbuilt ensures peace of mind when it comes to battery protection and safety.

- **Lighter Weight:** Up to 1/3 the weight of traditional AGM batteries
- **Faster Recharge:** 5x faster recharge times than AGM's
- **Longer Life Cycle:** Up to 5000 cycles at 50% depth of discharge
- **Extremely Low Self-Discharge Rate:** can sit unused for longer periods of time
- **Purposely Built:** for Caravans, Camper trailers, Motor homes, 4WD, Marine Vessels, Trucks
- **Built-in Battery Management System:** Controls cell balancing, over and under voltage protection, short circuit protection, thermal protection
- **Proven Parallel Ability:** Use in parallel to increase your capacity for longer storage
- **Flat Discharge Curve:** longer run time and more efficient
- **Safety:** LiFePO<sub>4</sub> is the safest and most stable of all lithium chemistries reducing associated risks
- **Proudly Australian Owned and Operated**



REVOLUTION  
POWER AUSTRALIA

www.revolutionpower.com.au  
info@revolutionpower.com.au  
1300 303 498



## RPL12-100USlim LiFePO<sub>4</sub> Deep-Cycle Lithium Battery

### Electrical Specifications

Total Capacity	125Ah
Usable Capacity (C20, 25°C to 10.5v)	100Ah/1280Wh
Cell Rating	1C
Nominal Voltage	12.8v
Self-Discharge Rate	≤ 3%
Short Circuit Protection	200-500us

### Discharge Specifications

<sup>1</sup> Nominal Discharge	20A
<sup>1</sup> Maximum Continuous Discharge 60 mins 25°C	100A
<sup>2</sup> Pulse Discharge 30 mins 25°C	160A
<sup>3</sup> Peak Discharge 5 seconds	400A
Discharge Cut-Off Voltage	10.0v
Life Cycles 80% DOD	2000
Life Cycles 50% DOD	5000
Life Cycles 20% DOD	8000

### Optimum Operating Temperatures

Charge	-0 ~ 45 °C
Discharge	-20 ~ 60 °C
Storage	-20 ~ 40 °C

### <sup>1</sup> Optimum Life Cycles (Moderate Use)

### <sup>2</sup> Reduced Life Cycles (Harsh Use)

### <sup>3</sup> Diminished Life Cycles (Extreme Use)

### Mechanical Specifications

Dimension (L x W x H)	500x75x260mm
Weight	12.5kg
Cell Chemistry	LiFePO <sub>4</sub>
Case Material	Fire Retardant ABS
IP Rating	IP65
Terminal Type	M8


### Charge Specifications

<sup>1</sup> Nominal Charge 25°C	20A
<sup>1</sup> Recommended 25°C	≤50A
<sup>2</sup> Maximum	100A
Recommended Charge Voltage	14.6V ± 0.2V
BMS Charge Cut Off Voltage	15.6v

### Compliance

Certifications and Testing	ISO9001 Certified
	CE Certified
	RoHS Certified
	UN38.3 Certified
	SGS Audited
	Intertek Audited
	IEC 62619 (Cells & Battery) 62133/UL 1642 Certified
	Approved for Use in Internal/Enclosed Area

### Dimensions

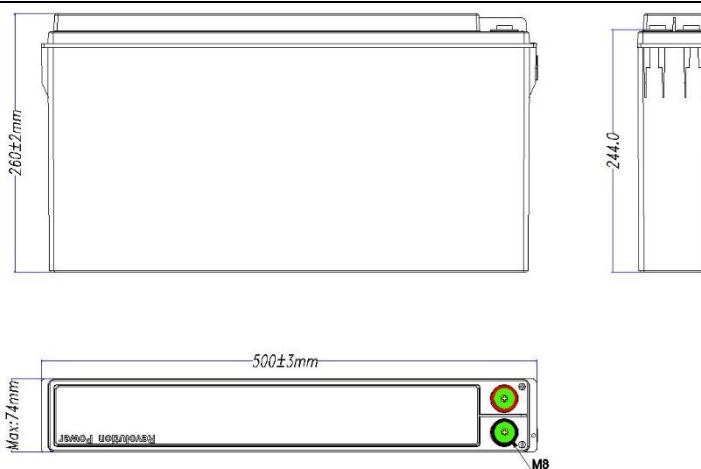

**ISO9001**  
CERTIFIED

**CE**  
CERTIFIED

**IP65**

**UN38.3**

**IEC**

**RoHS**  
Compliant